


LARVIK PLAIN/UNIVERSAL

Size: All Larvik Shapes and Sizes

The Plain/Universal cabin is suitable for any type or wattage of electric shower or tap fitting as long as there is physically enough room to mount it on the corner column. The shower is supplied with a clamp on adjustable shower rail that can be fitted anywhere on the rear wall panels.

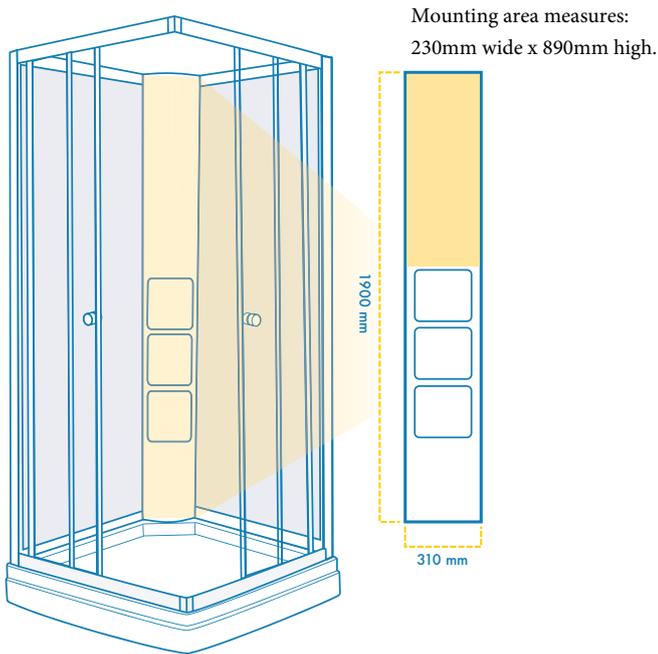


Height
Cabin without roof: 2060mm
Cabin with roof: 2150mm

Shapes & Sizes



Quadrants

800x800, 900x900,
1000x1000




Offset Quadrants

1200x800 (right) 800x1200 (left)
1200x900 (right) 900x1200 (left)





Square

800x800, 900x900



Rectangular

900x700 (right) 700x900 (left)
1100x900 (right) 900x1100 (left)



Delivery

Larvik showers are sectional and will be delivered in four to six boxes (depending on specifications) for assembly on site. All the sectional pieces will fit through standard doorways and up stairways.

Basics

These showers are self contained free standing requiring none or minimal sealant and simply require assembly and connection to your services.

Assembly

You will require access all around the unit in order to assemble it. Once assembled the unit can be simply connected via flexible pipework and pushed back into position. The rear walls are completely obscured and it is not necessary to tile behind the shower although it should be sited on a firm level surface.

Connection / Water

The water connection position, fittings and water supply requirement for the plain/universal model will depend entirely on what type of shower unit is fitted to the column. The Unit does come with flexible pipes although please check that these are suitable for your chosen fitting. Flexible pipes or access to disconnect them will be necessary. There is space to bring pipework behind the corner column or behind the rear wall panels.

Connection / Waste

The shower has an easy plumb raised tray built over a stainless steel box frame with adjustable feet. There is a fall of approximately 10cm from drain in the tray to ground level. The tray has a removable front skirt and is fitted with a 90mm fast flow shallow trap and comes complete with an extendable flexible waste pipe. Due to the removable skirt that allows access to the trap from the front it is also possible to run fixed waste pipe and connect directly to the trap with the shower in position.